

NICHYU
ELECTRIC LIFT TRUCKS

ELECTRIC LIFT TRUCKS THREE-WHEELER


Models: FBT13P, 15P & 18P



FBT-60 Series




THREE-WHEELER FBT-60 Series

SPECIFICATIONS

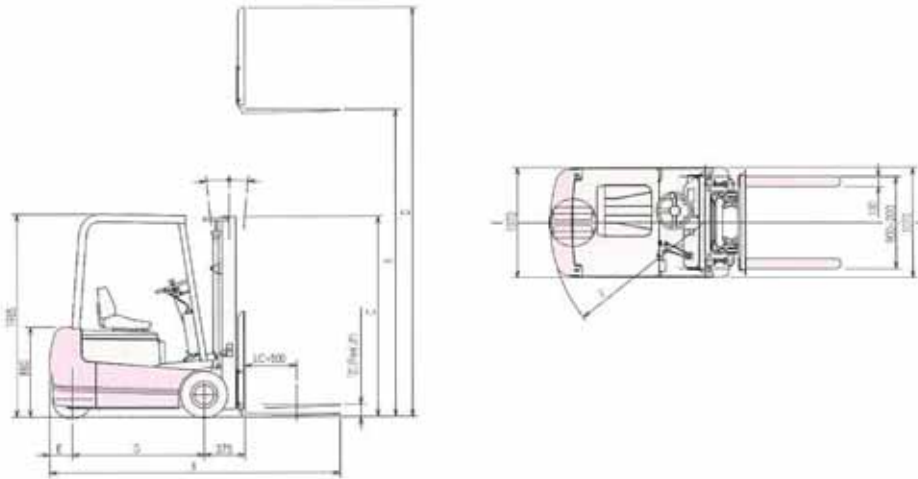

Model				FBT13	FBT15	FBT18
Capacity	at LC=500		kg	1250	1500	1750
Lifting Height	A		mm	3000	3000	3000
Free Lift			mm	120	120	120
Tilt Angle	For-/Back-ward		deg	<Mast> 5/6	<Mast> 5/6	<Mast> 5/6
Fork	Dimensions (L/l/r)		mm	1070/100/35	1070/100/35	1070/100/35
	Spread (Max/Min)		mm	900/200	900/200	900/200
Overall Length	B		mm	2840	2940	2995
Overall Width			mm	1070	1070	1070
Height	Mast lowered		C mm	1960	1960	1960
	Mast extended		D mm	4000	4000	4000
	Overhead Guard		mm	1985	1985	1985
Overhang	Rear overhang		E mm	215	215	270
	Minimum Turning Radius		F mm	1395	1495	1550
Travel Speed	Laden / Unladen		km/h	13.5/15.5	13.0/15.0	12.5/14.5
Lifting Speed	Laden / Unladen		mm/s	315/475	305/465	285/455
Max. Gradeability	3min. rating, 1.5km/h and over		%	16.0	14.5	12.5
Service Weight	Incl. Battery		kg	2800	2900	3170
Tyres	Front		mm	18x7-8-14PR	18x7-8-14PR	18x7-8-16PR
	Rear		mm	18x7-8-14PR	15x4 1/2-8-12PR	15x4 1/2-8(SOLID)
Wheelbase	G		mm	1180	1280	1280
Battery	Volts/Ampere hrs (5HR)		V/Ah	48/320	48/350	48/390
Drive Motor	60min. rating		kw	2x3.5	2x3.5	2x3.5
Hydraulic Motor	5min. rating		kw	8.8	8.8	8.8
Power Steering Motor	60min. rating		kw	0.5	0.5	0.5
Charger	Type (Built-in/Stationary)			Stationary	Stationary	Stationary

CAPACITY CHARTS

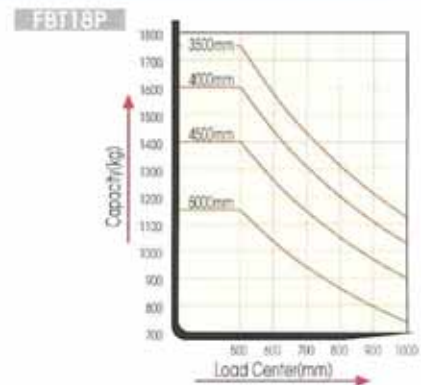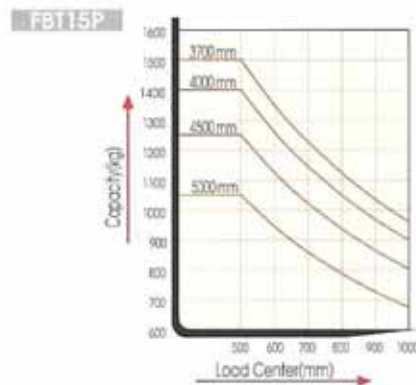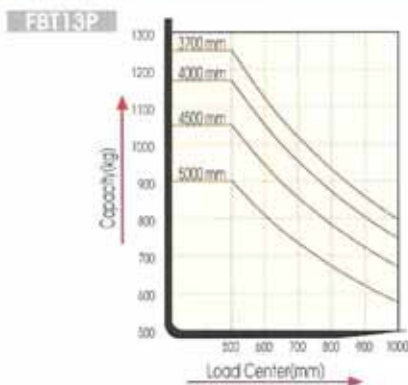

All specifications are confirmed based on manufacturer data.
All specifications are subject to change without notice.

NICHYU
NIPPON YUSOKI CO.,LTD.



A. VOLLEBREGT B.V.
VERKOOP- VERHUUR VAN VORKHEFTRUCKS
Bleiswijk

Telefoon (010) 521 32 88 - Fax (010) 521 96 73