

Model 2632R SCISSOR LIFTS



MORE ECONOMIC

- Lower Total Cost of Ownership.

MORE PRODUCTIVE

- Boost efficiency with optional AGM batteries.
- Improved uptime.

MORE ACCESS

- Standard equipped with variable tilt technology; indicating the working envelope and platform height limitations when machine is positioned on slight side slopes.

SMART DESIGN

- Improved reliable, simple active pothole protection.
- Unparalleled component access.
- All steel components like platform and service trays.

Preliminary version



Standard Features

- 0.86 m roll-out deck extension
- Fold down handrails
- Half swing gate
- Removable platform control box
- Lanyard attach points
- Full proportional drive joystick control with integral thumb steer switch
- Proportional lift/lower speed control
- Joystick enable for lift and drive
- Zero load sensing system
- 4 x 6V 220 A/hr deep cycle batteries
- Automatic positive traction
- Programmable "Personality" settings
- On-board self-diagnostic testing
- Swingout steel battery/electrical compartments doors
- 27amp automatic battery charger
- Front wheel hydraulic drive motors
- Dual wheel automatic brakes (on rear wheels)
- Emergency brake release
- Active pothole protection system
- AC cable to platform
- Battery charge level indicator
- Variable tilt indicator
- Hourmeter
- Lubrication free scissor arm bushings
- Scissor maintenance prop
- Manual descent
- Horn
- Non-marking solid tyres (406 x 127)
- Lifting and tie down points
- Slope alarm and light
- Fork lift pockets

Standard Specifications

- | | |
|-------------------------------|-------------------------|
| • Tyres (Non-Marking Solid) | 406 x 127 mm |
| • Brakes | Multi-disc friction |
| • Drive (Nominal) | Hydraulic front-wheel |
| • Batteries | 4x 6V 220A/hr |
| • Charger (120/240V -50/60Hz) | 24v @27Amp Automatic |
| • Pump Motor | 4.5kW |
| • Hydraulic System | 18L |
| • Hydraulic Reservoir Pump | Fixed displacement gear |

Accessories & Options

- | | |
|--|---|
| • 220A/hr maintenance free AGM batteries in lieu of standard | • Multi-display indicator (MDI) |
| • All motion alarm | • ClearSky Locate |
| • Inboard pipe racks | • ClearSky CAN |
| • Amber strobe light | • Drive motor covers |
| • Anti-vandalism package | • Extension deployment handles |
| | • Synthetic biodegradable hydraulic oil |

Model 2632R

SCISSOR LIFTS

Performance


• Working Height	9.77 m
• Platform Height - Elevated	7.77 m
A. Stowed Height	2.24 m
B. Platform Height - Lowered	1.11 m
C. Platform Railing Height	1.13 m
D. Stowed Height (Rails Folded)	1.79 m
E. Platform Size Inside (W x L)	0.65 m x 2.13 m
F. Deck Extension	0.86 m
G. Overall Width	0.81 m
H. Overall Length	2.40 m*
I. Wheelbase	1.88 m
J. Ground Clearance (centre of machine)	9.8 cm
• Platform Capacity - indoor	230 kg
• Platform Capacity - outdoor	125 kg
• Capacity on Deck Extension	120 kg
• Lift/Lower Time (no load)	56/42 sec.
• Maximum Drive Height	6.1 m**
• Machine weight ¹	1,955 kg
• Maximum Ground Bearing Pressure	tbc
• Drive Speed - Lowered	3.2 km/h
• Drive Speed - Elevated	0.8 km/h
• Gradeability	25%
• Turning Radius - Inside	0.0 m
• Turning Radius - Outside	2.21 m

* Includes ladder -10.6 cm, excluding ladder.

** Outdoor measure, full height indoor.

¹ Certain options or country standards may increase weight and/or dimensions.

Dimensions

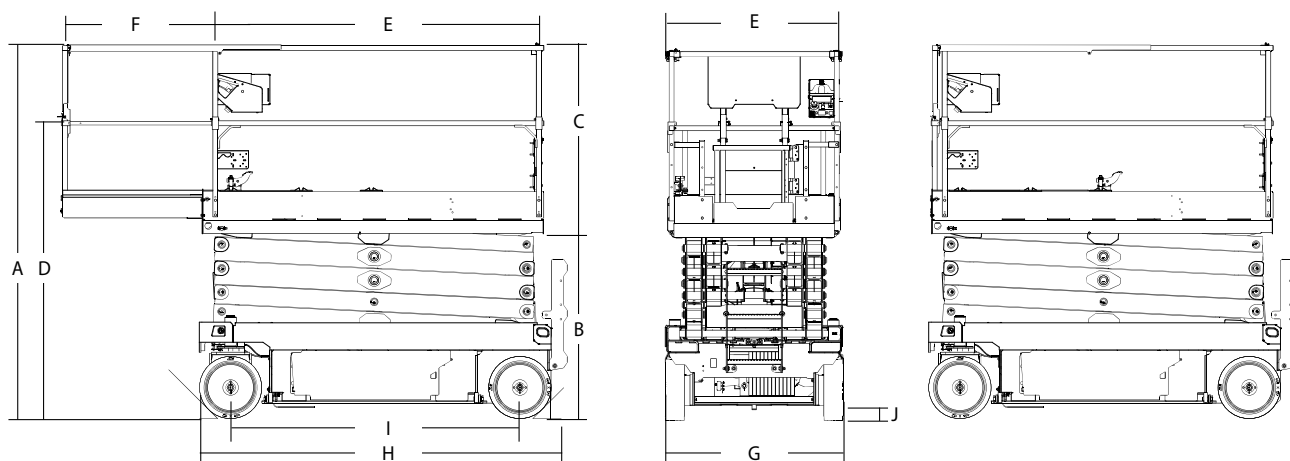

IMPORTANT

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.

JLG EMEA BV

Polaris Avenue 63
2132 JH Hoofddorp
The Netherlands
Phone: +31 (0)23 565 5665
www.jlg.com

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification.

An Oshkosh Corporation Company